



DISTRIBUITO DA: SCS & PARTNERS - VIBRO-ACOUSTIC
CAMPOARSEGO PD - AVIGLIANA TO - ROMA

info@vibro-acoustic.eu www.vibro-acoustic.eu

RIONOTE

The groundbreaking multi function measuring system from RION

Compact design, easy and intuitive operation

Wireless connections

Use it anytime anywhere!



SCS - VIBRO-ACOUSTIC

DISTRIBUTORE RION UFFICIALE DAL 1988

Analysis result display examples

FFT analysis

RIONOTE enables you to perform FFT analysis on multiple channels simultaneously. The results are shown in clear graphs on the large color screen, in real time, or from stored data when using the recall function. A marker allows you to scroll through the data, and enables the readout of the level of a frequency of interest.



Transfer function

The transfer function represents the relation between an input signal and output signal in the frequency domain, allowing the determination of amplitude and phase. In this mathematical calculation category, the RIONOTE supports coherence function and cross spectrum processing.



Waveform recording

By using the waveform recording program, it is possible to display and record the time waveform of the incoming signal(s). Available recording time depends on the number of input channels and the selected frequency range. The figure below shows a time waveform displayed on the screen of the Main Control Unit.



Waveform post processing

After completing waveform recording (as explained above), the stored waveforms can be displayed on the Main Control Unit's large screen, and played back by using the earphone jack output. Moreover, various secondary post processing functions for the waveform data are available in the Main Control Unit, including FFT analysis as shown in the screen example below.



RIONOTE is combining the newest quality, ease of use and economical sense, which can be configured to up to 16 channels anywhere wireless. The Main Control Unit is program of your choice. All on a large color screen, both programs and hardware for this mea



RIONOTE


Main Control Unit and Amplifier

Supports direct connection of microphones and piezoelectric accelerometers.



Sensor amplifier slides into the underside of the Main Control Unit

RIONOTE System Configuration

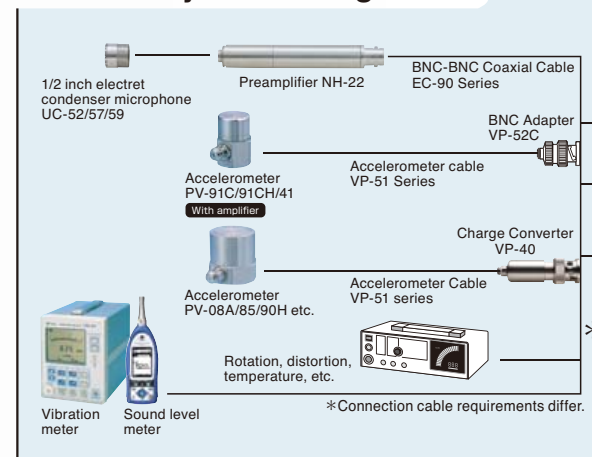

technology with the traditional virtues of RION;
 RIONOTE consists of a Main Control Unit SA-A1
 channels and allowing you to perform measurements
 as easy and intuitive to operate, with the dedicated
 or touch screen. RION will continuously develop
 measuring system of the future.



RIONOTE also enables the use of a wireless dock or wireless sensor amplifiers to avoid the cost and hassle of cables. A plurality of wireless docks and wireless sensor amplifiers can be used simultaneously, up to 16 channels, to store the measured data in the Main Control Unit as well as in the memory of wireless dock or wireless sensor amplifiers.



Wireless Dock and Amplifier

Separate type wireless dock and amplifier
 (2 channel or 4 channel configuration)



Wireless Sensor Amplifier

Integrated type wireless dock and
 amplifier (single channel configuration)

Octave band analysis

Real time analysis of noise or vibration levels for evaluation and designing countermeasures is usually performed by means of octave band analysis (using either octave bands or 1/3 octave bands). The below screen sample of the RIONOTE displays octave analysis results in 4 channels as a graph and numeric values at the same time.





RIONOTE intuitive user interface

Lets the user select the required program for the respective purpose: SX-A1FT (FFT analysis), SX-A1RT (octave band analysis), or SX-A1WR (waveform recording). The right side of the screen provides access to various settings.



RIONOTE calibration screen

Serves for calibration of microphones or accelerometers connected to the SA-A1.

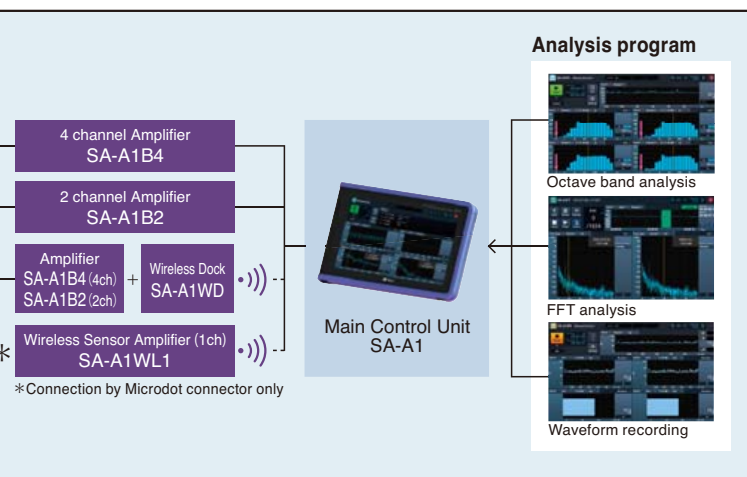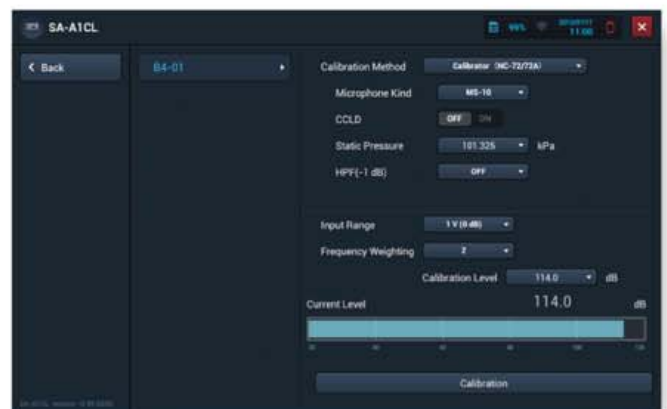

■ Specifications

RIONOTE Main Control Unit SA-A1, RIONOTE 4 channel/2 channel Amplifier SA-A1B4/B2

Input section	
Number of channels	4 (2), BNC connectors
Max. input voltage	±13 V
CCLD	2 mA 24 V
Amplifier section	
Frequency Range	DC to 20 kHz or 1 Hz to 20 kHz
Input range	-40 dB to 20 dB, 20-dB steps, 0 dB ref. $V_{rms} = 1 V$
Residual noise	At range full-scale: -85 dB or less (0 dB range, AP level)
Dynamic range	100 dB or better (0 dB range, $f_s = 51.2 kHz$, 400 line FFT noise level)
Phase difference between channels	±1 deg. or less (1 Hz to 20 kHz, same input range)
A/D converter section	
A/D converter	24 bit, delta-sigma type, simultaneous sampling
Sampling frequencies	51.2 kHz, 25.6 kHz, 12.8 kHz, 5.12 kHz, 2.56 kHz, 1.28 kHz, 512 Hz, 256 Hz, 48 kHz, program dependent
Display	
Touch panel	10.1 inch TFT color LCD, 1 280 x 800 pixels
Touch panel	Multi-touch
Input/output section	
USB	USB 2.0 Type B x 1
Earphone jack	Yes
SD card slot	Yes (SDHC support, max. 32 GB)
DC input	
Number of channels	1, BNC connector
Input voltage range	0 to 10 V
A/D converter	10 bit successive approximation type
Sampling frequency	Approx. 1 Hz
Other items	
External trigger	
Max. trigger input voltage	5 V
Trigger threshold	TTL
Other trigger specifications	Open collector supported, internal pull-up 3.3 V
Power supply	Li-Ion battery (battery life approx. 4 hours, depending on usage conditions), AC adapter
Dimensions, Weight	188 (H) x 275 (W) x 30 (D) mm SA-A1: 1 200 g (incl. 280 g battery, SA-A1B4 mounted)
Operating temperature range	-10 °C to +50 °C

RIONOTE Wireless Dock, SA-A1WD (and Amplifier SA-A1B4/B2)

Input	4 or 2 channels (Amplifier SA-A1B4/B2 needed)
Signal transfer to main platform	
Wired	Ethernet 100 base-TX
Wireless	WLAN (IEEE802.11a/b/g/n, 2.4/5 GHz), ZigBee (IEEE802.15.4, 2.4 GHz)
Distance of wireless transfer	about 50 m*
Interface	USB2.0 (miniB, data output to PC)
Memory	SD card (on Amplifier SA-A1B4/B2)
Power supply	8 IEC R6 (sizeAA) batteries, AC adapter
Dimensions, Weight	Approx. 42 (H) x 193 (W) x 95.6 (D) mm, Approx. 500 g (incl. battery)

* Depending on usage conditions

RIONOTE Wireless Sensor Amplifier, SA-A1WL1

Input	1 channel (Microdot connector)
Signal transfer to platform	
Wired	Ethernet 100 base-TX
Wireless	WLAN (IEEE802.11a/b/g/n, 2.4/5 GHz), Zigbee (IEEE802.15.4, 2.4 GHz)
Distance of wireless transfer	about 50 m*
Interface	USB2.0 (miniB, data output to PC and power supply)
Memory	Internal memory (2 GB)
Power supply	Li-Ion battery, AC adapter
Dimensions, Weight	Approx. 21 (H) x 54 (W) x 83.5 (D) mm, Approx. 100 g (incl. battery)

* Depending on usage conditions

SX-A1FT, RIONOTE Program for FFT

General real-time analysis processing		
Processing outline	FFT analysis (non-continuous frames when used in real time)	
Number of channels	Max. 4 channels	
Analysis frequencies	51.2 kHz, 25.6 kHz, 12.8 kHz, 5.12 kHz, 2.56 kHz, 1.28 kHz, 512 Hz, 256 Hz	
Trigger	Trigger modes	Free, Single, Repeat
	Trigger source	Waveform, External, Rotation speed
	Trigger position	± $\frac{1}{N}$ (N: number of analysis points)
Arithmetic functions	Time waveform for 1 frame, Power spectrum, Cross spectrum, Transfer function, Coherence	
Window functions	Rectangular, Hanning, Flat-top, Exponential, Force	
Number of analysis points	256, 512, 1 024, 2 048, 4 096, 8 192, 16 384	
Averaging and other processing functions	Average, Exponential Average, Max Hold	
Number of averaging runs	1 to 1 024	
General post-analysis processing		
Outline	FFT analysis of WAVE files recorded with WR function	
Number of channels	Max. 4 channels	
Arithmetic functions	Time waveform for 1 frame, Power spectrum, Cross spectrum, Transfer function, Coherence, Overall, Partial overall	
Window functions	Rectangular, Hanning, Flat-top, Exponential, Force	
Number of analysis points	1 024, 2 048, 4 096, 8 192, 16 384, 32 768	
Overlap ratio	0 %, 25 %, 50 %, 75 %	
Averaging and other processing functions	Average, Exponential Average, Max Hold	
Number of averaging runs	1 to 1 024	

SX-A1RT, RIONOTE Program for 1/3 Octave Analysis

Standard compliance	JIS C1513 Class 1, JIS C1514 Class1, IEC 61260:1995 Class1, ANSI S1.11-2004 Class1	
Band filter center frequencies and number of bands		
Octave bands	0.5 to 16 000 Hz, 17 bands	
1/3 octave bands	0.4 to 20 000 Hz, 49 bands	
Instantaneous value data (every 100 ms)	Time weighted level L_p , Time averaged level L_{eq} , Time weighted maximum level L_{max}	
Processing value data	Time averaged level L_{eq} , Sound exposure level L_E , Time weighted maximum level L_{max} , Time weighted minimum level L_{min} , Time percentile level L_N (5, 10, 50, 90, 95, 33.3), max. 5 values	
Store function	Auto/Manual	
Time weighting characteristics	F (Fast) 125 ms, 630 ms, S (Slow) 1 s, 10 s	
Frequency weighting characteristics	A, C, Z	
Trigger	Trigger modes	Free/Single/Repeat
	Trigger source	AP level, Band level, External signal, Time

SX-A1WR, RIONOTE Program for Waveform recording

Number of recording channels	1 to 4 channels + rotation or DC (1 s intervals)	
Sampling frequencies	51.2 kHz, 25.6 kHz, 12.8 kHz, 2.56 kHz, 1.28 kHz, 256 Hz	
Quantization	16 bit/24 bit	
Trigger	Trigger modes	Free/Single/Repeat
	Trigger source	Waveform/Time/External/Rotation speed
Voice memo marker function	Yes	
Monitor output (playback)	Allows listening to recorded data (51.2 kHz, 25.6 kHz, 12.8 kHz only)	
Recorded data	WAVE format	

SCS VIBRO-ACOUSTIC

DISTRIBUTORE UFFICIALE RION DAL 1988

* Windows is a trademark of Microsoft Corporation.

* Specifications subject to change without notice.

ISO 14001 RION CO., LTD.
ISO 9 0 0 1 RION CO., LTD.



Distributed by:

VIBRO-ACOUSTIC SRL

Via Antoniana 278 - 35011 Campodarsego PD

info@vibro-acoustic.eu www-vibro-acoustic.eu

tel. 049 9201595 / 011 9348705 / 3482336565



http://svmeas.rion.co.jp/

3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan
Tel: +81-42-359-7888 Fax: +81-42-359-7442

This product is environment-friendly. It does not include toxic chemicals on our policy.
This leaflet is printed with environmentally friendly UV ink on recycled paper.